


Ordering code
FC60 - 5t
Model Capacity

Wiring Diagram

Capacity/量程 (T)	h	H	C	D	E	M	SR
0.3/0.5/1	32	40	78	15	64	M6	40
2/3/5/10	32	44	82	22	66	M8	50
15/20/30	62	70	127	25	90	M10	60

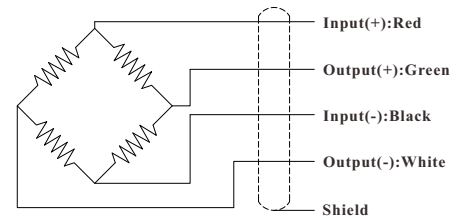

--- Specifications / 规格参数 ---

Capacity/量程	0.3/0.5/1/2/3/5/10/15/20/30 t		
Rated Output 额定输出	2.0 mV/V	Compensated Temp. 温度补偿范围	0...+40°C
Excitation 激励电压	5~15V	Operating Temp. 工作温度范围	-20...+60°C
Zero Balance 零点输出	±0.05mV/V	Temp. Shift Zero 零点温度漂移	±0.05% of R.O./10°C
Nonlinearity 非线性	±0.05% of R.O. ≥10t: ±0.1% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.05% of R.O./10°C
Hysteresis 滞后	±0.05% of R.O. ≥10t: ±0.1% of R.O.	Input Resistance 输入阻抗	750±100Ω
Nonrepeatability 非重复性	±0.03% of R.O. ≥10t: ±0.05% of R.O.	Output Resistance 输出阻抗	700±50Ω
Creep(30min) 蠕变	±0.05% of R.O.	Insulation Resistance 绝缘阻抗	>5000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP66
Ultimate Overload 极限过载	200% of F.S.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	≤3: Ø5*3000mm 4-core shielded cable ≥5t: Ø5.8*6000mm 4-core shielded cable		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知