

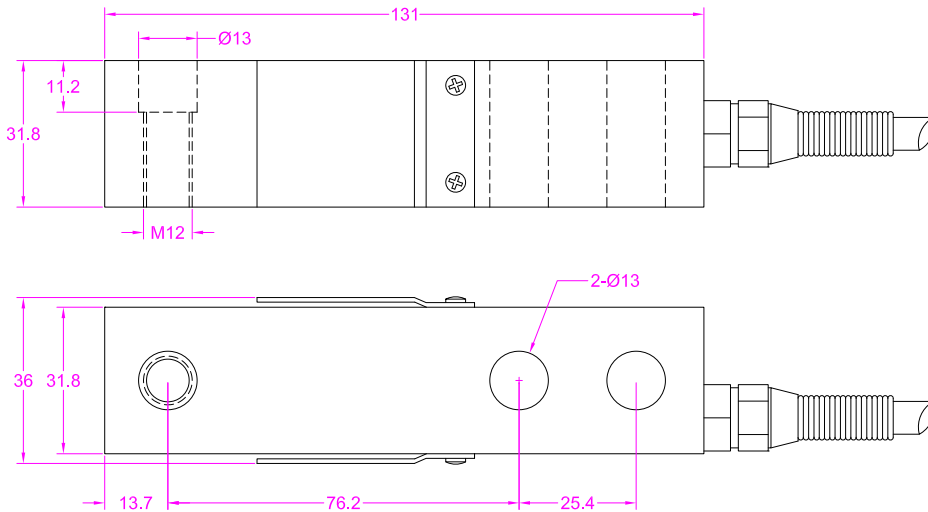


Load direction/加载方向

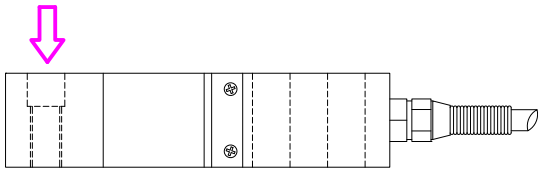

Ordering code

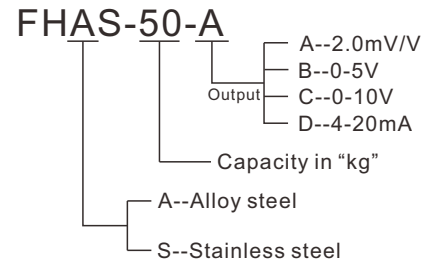

--- Specifications / 规格参数 ---

Capacity	50/100/200/300 kg		
Rated output	2.0mV/V	0-5V(3-wire)	0-10V(3-wire) 4-20mA(2-wire)
Excitation	5-15V	12V DC	24V DC
Zero balance	±3% of R.O.		
Nonlinearity	±0.02% of R.O.	±0.15% of R.O.	
Hysteresis	±0.02% of R.O.	±0.15% of R.O.	
Non-repeatability	±0.02% of R.O.	±0.1% of R.O.	
Creep(5min)	±0.02% of R.O.	±0.1% of R.O.	
Safe Overload	150% of F.S.		
Ultimate Overload	200% of F.S.		
Working Temp.	-20...+60°C		
Temp. Shift on Zero	±0.02% of R.O./10°C	±0.1% of R.O./10°C	
Temp. Shift on Rated output	±0.02% of R.O./10°C	±0.1% of R.O./10°C	
Input Resistance	385±30Ω	/	
Output Resistance	385±30Ω	/	
Insulation Resistance	>2000MΩ(50V)		
Ingress Protection	IP66(Contact us for higher level)		
Material	FHAS--Alloy steel FHSS--Stainless steel		
Cable	Ø6*2800mm shielded cable		

• Subject to change without notice / 如有更改,不另行通知