


Ordering code
FLCA - 10t
Model Capacity

Wiring Diagram/接线图

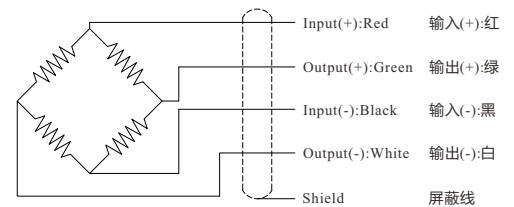

Capacity(ton)	H	D	d	SR
1/2	16.5	15.9	13.4	100
5/7.5	22.4	22.4	20.4	100
10/15	28.7	31.8	28.9	125

--- Specifications / 规格参数 ---

Capacity/量程	1/2/5/7.5/10/15 ton		
Rated Output 额定输出	2.0 mV/V	Compensated Temp. 温度补偿范围	-10...+40°C
Excitation 激励电压	3~12V	Operating Temp. 工作温度范围	-20...+60°C
Zero Balance 零点输出	±0.1mV/V	Temp. Shift Zero 零点温度漂移	±0.05% of R.O./°C
Nonlinearity 非线性	±0.5% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.05% of R.O./°C
Hysteresis 滞后	±0.5% of R.O.	Input Resistance 输入阻抗	380±30 Ω
Nonrepeatability 非重复性	±0.3% of R.O.	Output Resistance 输出阻抗	352±5 Ω
Creep(3min) 蠕变(3min)	±0.1% of R.O.	Insulation Resistance 绝缘阻抗	>5000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP62
Ultimate Overload 极限过载	200% of F.S.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	Ø1.9*3000mm 4-core shielded cable Ø1.9*3000mm 4芯屏蔽线		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知