


Dimensions in "mm"

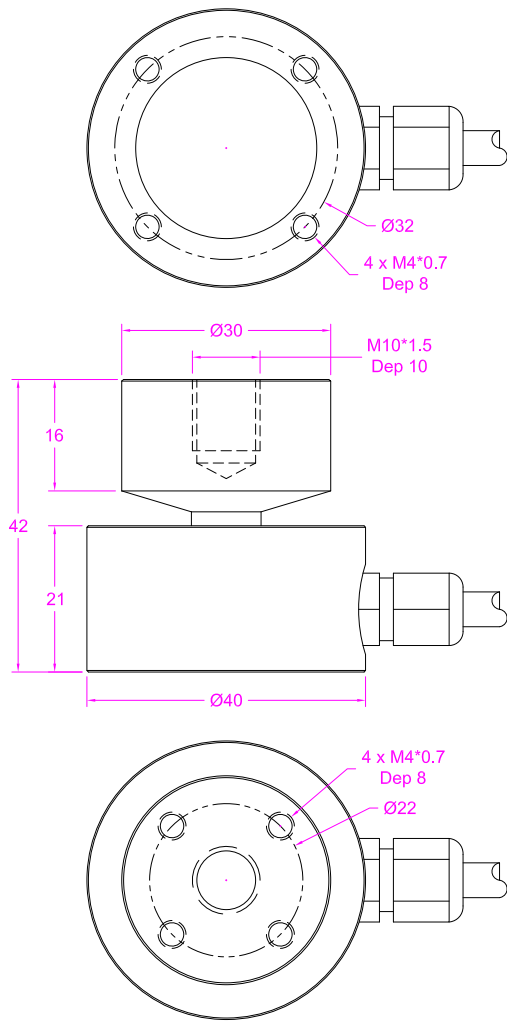


**Ordering code**  
**FXFE - 100kg**

Model Capacity

Load direction

受力方向



--- Specifications / 规格参数 ---

Capacity/量程	50/100/200/500/1000 kg		
Rated Output 额定输出	0-10V	Safe Overload 安全过载	150% of F.S.
Excitation 激励电压	15~24V DC	Ultimate Overload 极限过载	200% of F.S.
Zero Balance 零点输出	<0.06V	Operating Temp. 工作温度范围	-10...+50°C
Nonlinearity 非线性	±0.5% of R.O.	Temp. Shift Zero 零点温度漂移	±0.03% of R.O./°C
Hysteresis 滞后	±0.5% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.03% of R.O./°C
Nonrepeatability 非重复性	±0.2% of R.O.	Ingress Protection 防护等级	IP65
Creep(5min) 蠕变(5min)	±0.1% of R.O.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	Ø5*2000mm 4-core shielded cable Ø5*2000mm 4芯屏蔽线		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知