


Ordering code
FHPB - 75kg
 Model Capacity

Capacity	L	W	H	W1	L2	L3	L4	D1	D2
3.75kg	70	39	1.55	27.8	4.9	14	28	5.1	5.1
7.5kg	70	39	2.22	27.8	4.9	14	28	5.1	5.1
15kg	70	39	3.14	27.8	4.9	14	28	7.6	5.1
37.5kg	76.2	44.5	4.08	30	6	15	29.3	7.6	6.6
75kg	84.4	54.8	6.4	30	6.4	15	34	7.6	6.6
150kg	107.3	69.9	7.9	44.5	7.8	22.9	45.9	M10	8.1
375kg	119.4	76.1	10.7	50.8	9.2	25.4	52.6	9.1	9.8

Wiring Diagram/接线图

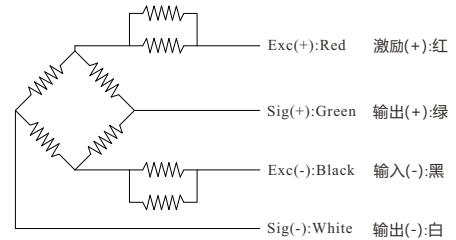

--- Specifications / 规格参数 ---

Capacity/量程	3.75/7.5/15/37.5/75/150/375 kg		
Rated Output 额定输出	1.0±0.002 mV/V	Compensated Temp. 温度补偿范围	-10...+40°C
Excitation 激励电压	3~15V	Operating Temp. 工作温度范围	-30...+65°C
Zero Balance 零点输出	±0.06mV/V	Temp. Shift Zero 零点温度漂移	±0.02% of R.O./10°C
Nonlinearity 非线性	±0.02% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.02% of R.O./10°C
Hysteresis 滞后	±0.02% of R.O.	Input Resistance 输入阻抗	1080±50Ω
Nonrepeatability 非重复性	±0.02% of R.O.	Output Resistance 输出阻抗	1000±10Ω
Creep(30min) 蠕变	±0.02% of R.O.	Insulation Resistance 绝缘阻抗	>5000MΩ(50V)
Safe Overload 安全过载	120% of F.S.	Ingress Protection 防护等级	IP65
Ultimate Overload 极限过载	150% of F.S.	Material of Element 弹性体材料	Aluminum alloy 铝合金
Cable/导线	4 x Ø1.2*1000mm		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知