


Wiring code		
1.0mV/V		0-5V/0-10V/ 4-20mA
Power+	Red	Power+
Power-	Black	Power- & Output-
Output+	Green	/
Output-	White	Output+



Ordering code

FZAK-100N - 2 - 2

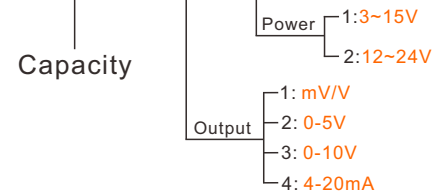

--- Specifications / 规格参数 ---

Capacity/量程	100/200/300/500/1000 N		
Rated Output 额定输出	1.0mV/V	Excitation 激励电压	3-15V DC
	0-5V 0-10V 4-20mA		12~24V DC
Zero Balance 零点输出	±2% of R.O.	Ultimate Overload 极限过载	200% of F.S.
Nonlinearity 非线性	±0.2% of R.O.	Operating Temp. 工作温度范围	-20...+60°C
Hysteresis 滞后	±0.2% of R.O.	Temp. Shift Zero 零点度温度漂移	±0.02% of R.O./°C
Nonrepeatability 非重复性	±0.1% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.02% of R.O./°C
Creep(3min) 蠕变	±0.1% of R.O.	Ingress Protection 防护等级	IP62
Safe Overload 安全过载	150% F.S.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	Ø5.5*3000mm		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知