
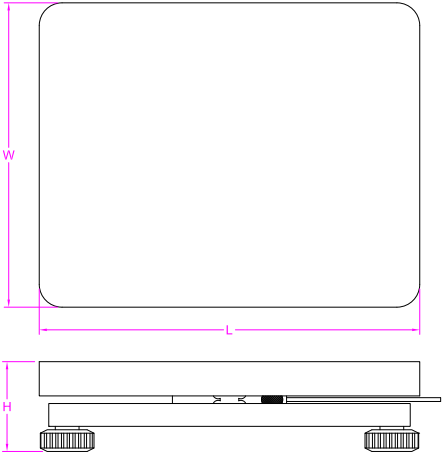


Ordering code

FWHN-100kg

ModelCapacity



Model	L*W*H	Capacity	Material
FWHM	40x30x12 (cm)	50/100/200 kg	Load cell: Aluminum Weighing frame: Carbon steel Platform: Stainless steel
FWHN	50x40x12 (cm)	50/100/200/300 kg	
FWHP	60x45x15 (cm)	50/100/200/300/500 kg	
FWHQ	80x60x18 (cm)	50/100/200/300/500/800 kg	

--- Specifications / 规格参数 ---

Capacity/量程	50/100/200/300/500/800 kg		
Rated Output 额定输出	2.0 mV/V	Compensated Temp. 温度补偿范围	0...+40°C
Excitation 激励电压	3~15V	Operating Temp. 工作温度范围	-20...+60°C
Zero Balance 零点输出	±0.1mV/V	Temp. Shift Zero 零点温度漂移	±0.03% of R.O./10°C
Nonlinearity 非线性	±0.02% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.02% of R.O./10°C
Hysteresis 滞后	±0.02% of R.O.	Input Resistance 输入阻抗	400±30Ω
Nonrepeatability 非重复性	±0.015% of R.O.	Output Resistance 输出阻抗	350±5Ω
Creep(30min) 蠕变(30min)	±0.03% of R.O.	Insulation Resistance 绝缘阻抗	>2000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP62
Ultimate Overload 极限过载	200% of F.S.	Material 材质	Aluminum & Steel 铝 & 钢
Cable 导线	Ø5*1200mm 4-core (Exc+:Red Exc-:Black Sig+:Green Sig-:White)		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知