


Capacity	L	W	H	D
10kN	160	60	28	6~14
20kN	160	60	28	10~18
50kN	180	68	34	16~26
100kN	200	80	40	24~36
200kN	240	90	46	24~36

Ordering code

FZTA-10kN - 2 - 2

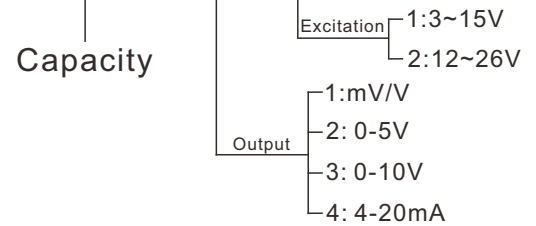

--- Specifications / 规格参数 ---

Capacity/量程	10/20/50/100/200 kN		
Rated Output 额定输出	1.0~1.5mV/V	Excitation 激励电压	3-15V DC
	0-5V 0-10V 4-20mA		12~26V DC
Zero Balance 零点输出	±5% of R.O.	Ultimate Overload 极限过载	200% of F.S.
Nonlinearity 非线性	±0.5% of R.O.	Operating Temp. 工作温度范围	-20...+60°C
Hysteresis 滞后	±0.5% of R.O.	Temp. Shift Zero 零点度温度漂移	±0.01% of R.O./°C
Nonrepeatability 非重复性	±0.2% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.01% of R.O./°C
Creep(5min) 蠕变	±0.05% of R.O.	Ingress Protection 防护等级	IP65
Safe Overload 安全过载	150% F.S.	Material of Element 弹性体材料	Alloy steel (合金钢)
Cable 导线	10/20kN: Ø5*3000mm 50/100/200kN: Ø5.8*6000mm		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知