


Ordering code
FT05 - 1NM
 Model Capacity

Wiring Diagram/接线图

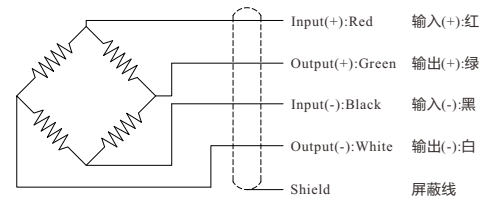

--- Specifications / 规格参数 ---


Capacity/量程	0.1/0.2/0.3/0.5/1/2/3/5NM		
Rated Output 额定输出	1.0 mV/V	Compensated Temp. 温度补偿范围	-10...+40°C
Excitation 激励电压	3~15V	Operating Temp. 工作温度范围	-20...+60°C
Zero Balance 零点输出	±0.05mV/V	Temp. Shift Zero 零点温度漂移	±0.02% of R.O./°C
Nonlinearity 非线性	±0.2% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.02% of R.O./°C
Hysteresis 滞后	±0.2% of R.O.	Input Resistance 输入阻抗	0.1~0.5Nm: 1000±50Ω 1~5Nm: 380±30Ω
Nonrepeatability 非重复性	±0.1% of R.O.	Output Resistance 输出阻抗	0.1~0.5Nm: 1000±50Ω 1~5Nm: 350±5Ω
Creep(10min) 蠕变(10min)	±0.1% of R.O.	Insulation Resistance 绝缘阻抗	>2000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP50
Ultimate Overload 极限过载	200% of F.S.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	Ø5*3000mm 4-core shielded cable with mating connector Ø5*3000mm 4芯屏蔽线		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

P-1/2

• Subject to change without notice / 如有更改,不另行通知

Custom torque sensor

Shaft type

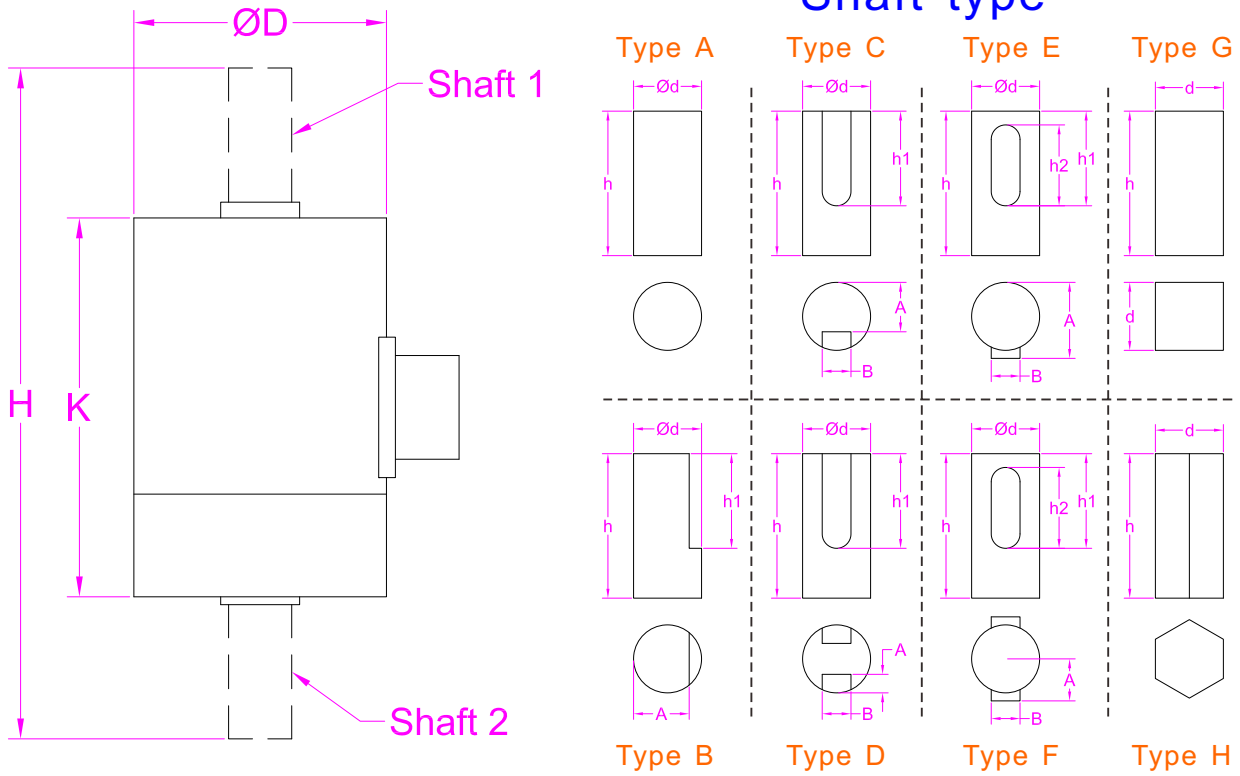

Capacity(NM)		Quantity	
H	K	D	
Shaft 1 type			
d	h	h1	
h2	A	B	
Shaft 2 type			
d	h	h1	
h2	A	B	
Other Requirement			

P-2/2

- For dimensions that don't matter, please fill in "Given by design" or acceptable range like "25~40mm".
- Drawings provided by clients are also welcome.
- Forsentek will evaluate the feasibility upon the given parameters and propose modifications accordingly to make it work.